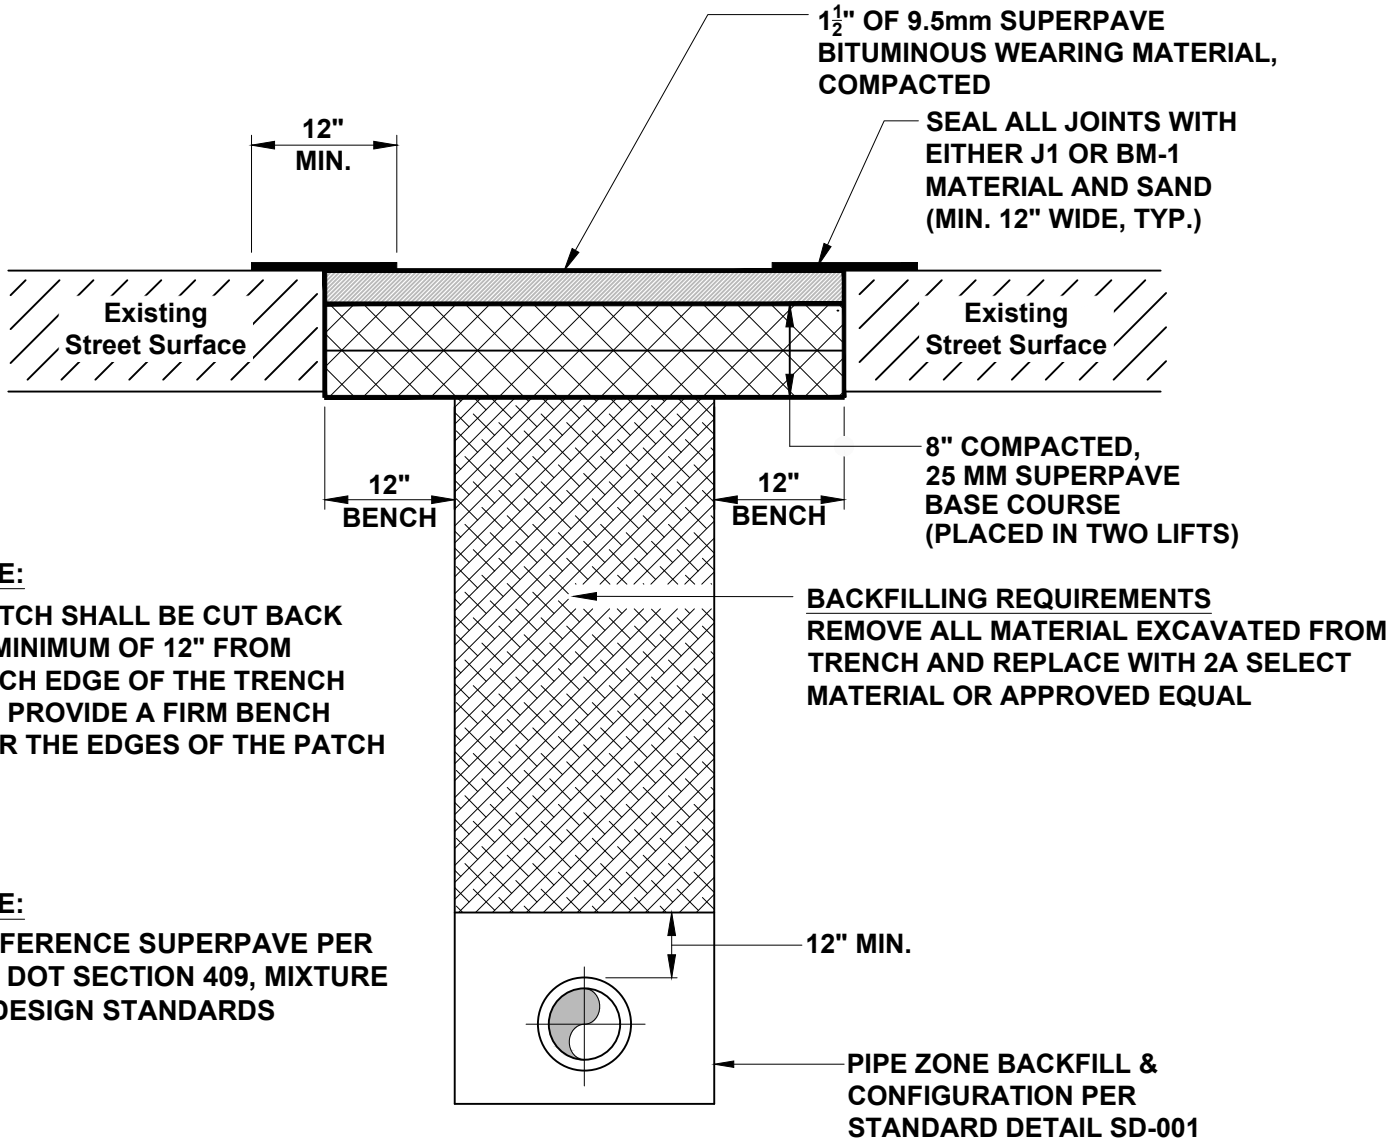

NOTE:

PATCH SHALL BE CUT BACK A MINIMUM OF 12" FROM EACH EDGE OF THE TRENCH TO PROVIDE A FIRM BENCH FOR THE EDGES OF THE PATCH

NOTE:

REFERENCE SUPERPAVE PER PA DOT SECTION 409, MIXTURE & DESIGN STANDARDS

NOTE:

DURING COLD WEATHER WHEN SUPERPAVE MATERIAL IS NOT AVAILABLE FROM THE ASPHALT PLANTS THE TRENCH SHALL BE BACKFILLED WITH BEDDING MATERIAL TO AN ELEVATION WITHIN 3" OF THE ROAD SURFACE. THE TRENCH SHALL THEN BE SURFACED WITH A TEMPORARY PATCH OF COLD PATCH MATERIAL. AS SOON AS THE ASPHALT PLANTS OPEN IN THE SPRING, THE CONTRACTOR SHALL REMOVE THE COLD PATCH MATERIAL AND SAW-CUT THE REQUIRED BENCHES AND THE SUPERPAVE MATERIAL SHALL THEN BE PLACED AND SEALED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTENANCE ON THE TEMPORARY PATCH AND SHALL KEEP A SMOOTH RIDING SURFACE ON THE STREET.

Municipal Authority Of The Township Of South Fayette 900 Presto Sygan Road Bridgeville, Pa 15017		TRENCH BACKFILL AND PAVEMENT REQUIREMENTS FOR TOWNSHIP ROADS
Not to scale	January 2022	Standard Detail SD-005